



| Lyro

# Luminaire Rochefort.



Meets the requirements of the Order of 27 December 2018 on the prevention, reduction and limitation of light pollution.



— —  
CHRYSALIS



## ▼ MATERIALS AND FINISHES

- Class II luminaire
- IP66 tightness
- Impact resistance: IK10
- One-piece body in die-cast aluminium
- Injected polycarbonate bowl
- Mounting on a one-piece base with a Ø60mm mast top in die-cast aluminium

- **PAINTING :**
- RAL powder coating of your choice
- Seaside option

## ▼ EQUIPMENT

### • OPTICAL BLOCK :

- Lifetime L90B10 100000h
- Luminous efficacy up to 135 lm/W
- LED source flux from 1000 to 18000lm
- Optical lenses in PMMA
- Aluminium PCB up to 4 PCBs
- Optics: Road (R), Semi urban (SU), Urban (U), Square (P), Cycle path (PCY), Pedestrian crossing, Architectural.
- Colour temperatures: 3000K, 2700K, 2200K, 1800K (4000K, on request) - Optional 2 colour temperature coexistence\*.
- ULR < 1%, ULR < 4% (in situ), CIE flux 3 code > 95%.

### • BUILT-IN APPARATUS :

- Quarter-turn flange
- Optional antenna socket (Zhaga, Nema)
- Driver Lite prog, Driver Full prog (with DALI output on request), Driver D4I and socket, optional
- \* Additional driver for mixed temperature option

### • ELECTRICAL PROTECTION :

- 10kV lightning arrester
- Varistor on request

• All our components are ENEC certified

## ▼ FIXINGS


### • STANDARD :

- Pole top end Ø60mm

## ▼ ORIGIN

- **95% FRENCH** (EXCLUDING ELECTRONICS)

## ▼ DIMENSIONS

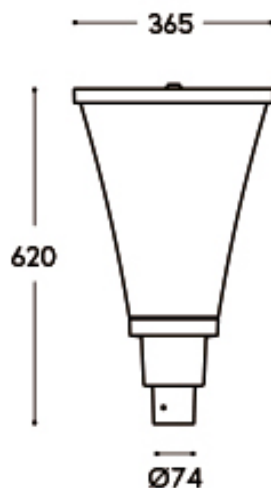

SCX (m2)	0.120
Weight (kg)	10.8

