

Bollard Athènes.²



✓ The project meets the requirements of the Order of 27 December 2018 on the prevention, reduction and limitation of light pollution.




▼ MATERIALS AND FINISHES

- Rectangular aluminum profile 100x200mm, Height 1000 or 1200mm
- Injected foundry luminaire, recessed into the head of the terminal, 10° inclination
- Access to the equipment via door
- Fixing plate with center distance 200x200mm as standard
- RAL powder coating of your choice, seaside option on request.

▼ EQUIPMENT

- IP66 OPTICAL BLOCK:
 - Class II lighting
 - 4 LEDs
 - PMMA lenses
 - Optics: "R",
 - Lifespan for 3000K: L90B10 100000h
 - ULR < 1%, CIE flux 3 code > 95%
 - Color temperature: 3000K as standard. 2700K, 2200K possible at no extra cost and 1800K optional.
- EQUIPMENT remote in the pole
 - IP66 waterproofing
 - Fullprog driver
 - Tight connector for wiring between luminaire and driver
 - Optional electrical connection box with terminal block and cut-off circuit
- OPTIONS:
 - Presence detection
 - Electrical outlet
 - Other optics on request

▼ DIMENSIONS

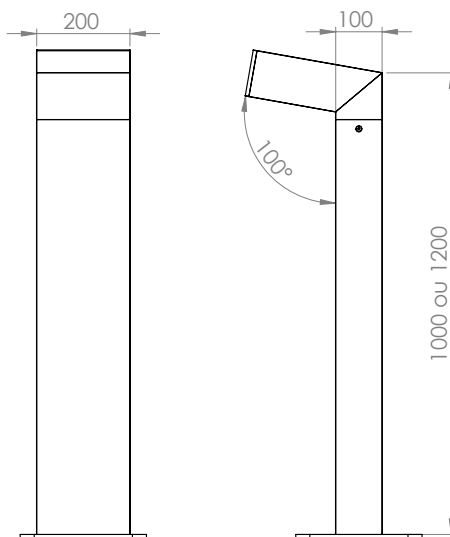

Number of LEDs and PCBs subject to change.

