# Luminaire Disco.

ROUND OR RECTANGLE

The combination of a tray and the round or rectangular Lolita module allows you to work on another scale. This new volume reinforces the presence of the luminaire and offers the possibility of playing with the color by touch.
















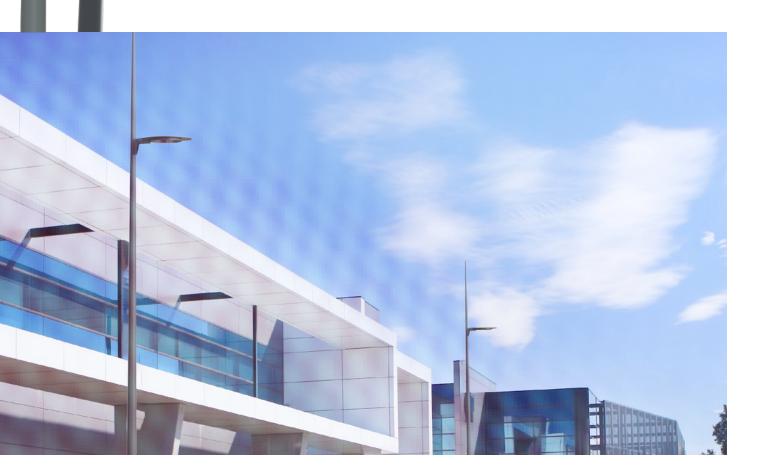



## **▼ MATERIALS AND FINISHES**

Class II luminaire

- Round version: a decorative round tray, Ø530mm, in aluminum
- Rectangular version: a decorative rectangular aluminum tray
- One-piece Lolita body in die-cast aluminum casting Ø370mm
- Sealed, screen-printed LOLITA bowl :
- in IK08 flat glass, as standard
- in IK10 polycarbonate, on request
- Aluminum strips between PCBs to reduce glare
- RAL / Akzo Nobel powder coating of your choice, seaside on request

### **▼** EQUIPMENT

- OPTICAL BLOCK:
- PMMA optical lenses
- Aluminum PCB (4 PCBs maximum)
- Optics: Road (R), Semi-urban (SU), Urban (U), Square (P), Cycle path (PCY), Pedestrian crossing, Architectural.
- Color temperatures: 3000K, 2700K, 2200K, 1800K (4000K, on request)
- Coexistence of 2 optional color temperatures\*.
- Cable gland
- Pre-wired HO7 RN-F flexible (Length depending on equipment)
- ULR < 1%, ULR < 4% (in situ), CIE flux 3 code > 95%


- EQUIPMENT remote at the base of the pole
- IP66 waterproofing
- Optional antenna socket (Fixing depending on configuration)
- Driver Light prog, Driver Full prog (With DALI output on request). SR or D4I driver and socket, optional
- \*Additional driver for mixed temperature option
- ELECTRICAL PROTECTION:
- 10kV surge protector on request
- -Varistor on request
- All our components are ENEC certified


### **▼** FIXINGS

- STANDARD:
- D60 side tip covering or penetrating

# **▼** DIMENSIONS

#### Round version





#### Rectangle version

