



Bollard Louxor.²

☑ The project meets the requirements of the Order of 27 December 2018 on the prevention, reduction and limitation of light pollution.




▼ MATERIALS AND FINISHES

- Square aluminum profile 115x115mm, Height 1000 or 1200mm
- Body of the luminaire in injected casting fixed to a surface, inclination 10°
- Access to the equipment via door
- Fixing plate with center distance 200x200mm as standard
- RAL powder coating of your choice, seaside option on request.
- Finish: bi-tone possible - at no extra cost

▼ EQUIPMENT

- IP66 OPTICAL BLOCK:
 - Class II lighting
 - 4 LEDs
 - PMMA lenses
 - Optics: "R"
 - Lifespan for 3000K: L90B10 100000h
 - ULR < 1%, CIE flux 3 code > 95%
 - Color temperature: 3000K as standard. 2700K, 2200K possible at no extra cost and 1800K optional.
- EQUIPMENT remote in the pole :
 - IP66 waterproofing
 - Fullprog driver
 - Tight connector for wiring between luminaire and driver
 - Optional: Electrical connection box with terminal block and cut-off circuit
- OPTIONS:
 - Presence detection
 - Electrical outlet
 - Other optics on request,. All our components are ENEC certified.

▼ DIMENSIONS

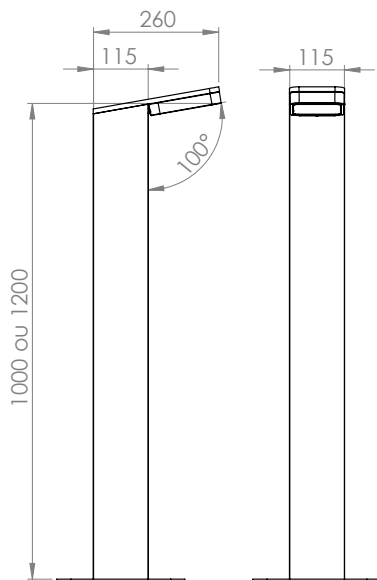

Number of LEDs and PCBs subject to change.

