




Luminaire Miroir.

✓ The project meets the requirements of the Order of 27 December 2018 on the prevention, reduction and limitation of light pollution.



CHRYSA LIS



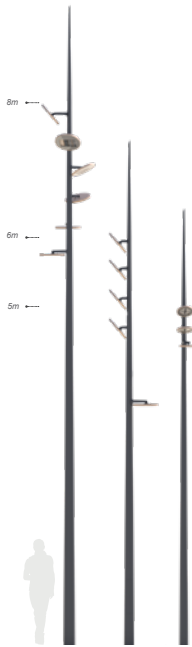


▼ MATERIALS ET FINISHES

- Round mirror luminaire, class II
- One-piece body in die-cast aluminum casting Ø370mm
- Sealed screen-printed bowls
 - in IK08 flat glass, as standard
 - in IK10 polycarbonate, on request
- Aluminum strips between PCBs to reduce glare
- RAL / Akzo Nobel powder coating of your choice, seaside option on request
- Adjustable lyre attachments from all angles
- Cylindrical conical mast in top 60 enhanced with a needle point.
- RAL / Akzo Nobel powder coating of your choice, seaside option on request

▼ EQUIPMENT

- OPTICAL BLOCK:
 - Lifespan L90B10 100,000h
 - Luminous efficiency up to 135 lm/W
 - LED source flux from 1000 to 18000lm
 - PMMA optical lenses
 - Aluminum PCB up to 4 PCBs
 - Optics: Road (R), Semi-urban (SU), Urban (U), Square (P), Cycle path (PCY), Pedestrian crossing, Architectural.
 - Color temperatures: 3000K, 2700K, 2200K, 1800K (4000K, on request)
 - Coexistence of 2 optional color temperatures*.
- Pre-wired HO7 RN-F flexible 6m
- ULR < 1%, ULR < 4% (in situ), CIE flux 3 code > 95%
- EQUIPMENT remote at the base of the mast:
 - IP66 waterproofing
 - Optional antenna socket (Zhaga, Nema)
 - Driver Lite prog, Driver Full prog (With DALI output on request). SR or D4I driver and socket, optional * Additional driver for temperature mix option
- ELECTRICAL PROTECTION: 10kV surge protector on request, Varistor on request. All our components are ENEC certified

▼ DIMENSIONS

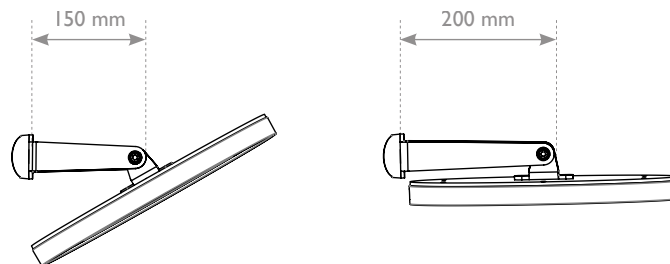

Number of LEDs and PCBs subject to change.

