


Bollard Olympie.²



✓ The project meets the requirements of the Order of 27 December 2018 on the prevention, reduction and limitation of light pollution.

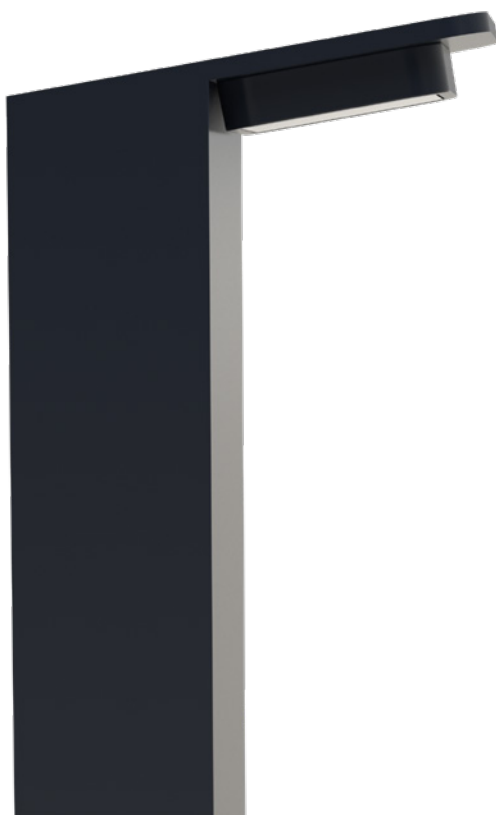

CHRYSA LIS



▼ MATERIALS AND FINISHES

- Rectangular aluminum profile 100x200mm, Height 1000 or 1200mm
- Body of the luminaire in injected casting fixed to a surface, inclination 10°
- Access to the equipment via door
- Fixing plate with center distance 200x200mm as standard
- RAL powder coating of your choice, seaside option on request.
- Finish: bi-tone possible - at no extra cost

▼ EQUIPMENT


• IP66 OPTICAL BLOCK:

- Class II lighting
- 4 LEDs
- PMMA lenses
- Optics: "R"
- Lifespan for 3000K: L90B10 100000h
- ULR < 1%, CIE flux 3 code > 95%
- Color temperature: 3000K as standard. 2700K, 2200K possible at no extra cost and 1800K optional.

EQUIPMENT remote in the pole

- IP66 waterproofing
- Fullprog driver
- Tight connector for wiring between luminaire and driver
- Optional: electrical connection box with terminal block and cut-off circuit
- OPTIONS:
Presence detection, Electrical outlet,
Other optics on request
- All our components are ENEC certified

▼ DIMENSIONS

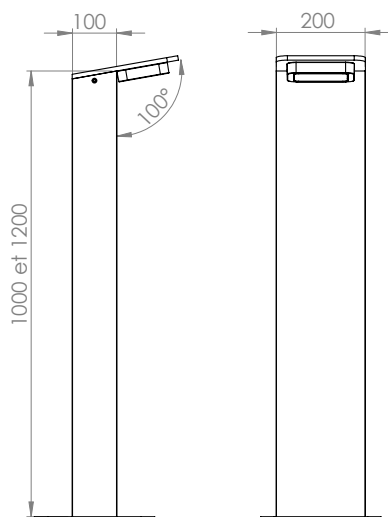

Number of LEDs and PCBs subject to change.

