


| Classic

Luminaire Garnier.

Luminaire of classic inspiration and rounded shape in led version.

✓ The project meets the requirements of the Order of 27 December 2018 on the prevention, reduction and limitation of light pollution.

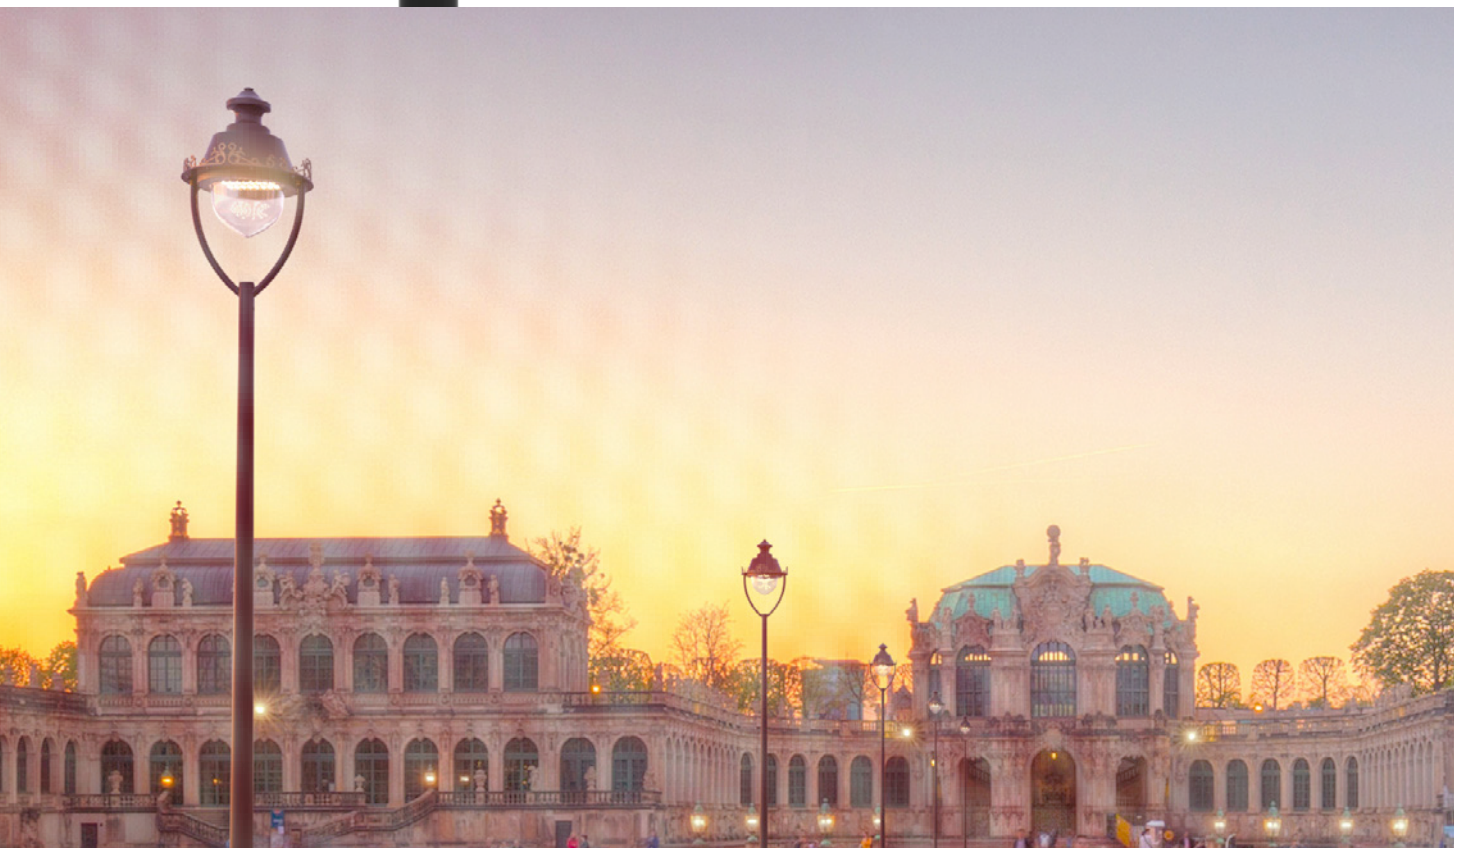

CHRYSA LIS



▼ MATERIALS AND FINISHES

- Luminaire class II
- Round section stepped dome, bottom diameter 485mm, top diameter 180mm, height 340mm, in spun aluminum.
- Fixed on the tray: One-piece Lolita body in die-cast aluminum Ø370mm
- Sealed silk-screened LOLITA bowl :
 - in flat glass IK08, as standard
 - in polycarbonate IK10, on request
- Aluminum strips between the PCBs to reduce glare
- **Option:** - Classic style thermoformed PMMA basins (2 models)
 - Optional laser-cut and riveted crown
- Customizable graphics upon request
 - Veil or classic biretta
 - Jamb shapes in the supported version
- RAL / Akzo Nobel thermo-lacquering at choice, seaside option on request

▼ EQUIPMENT

- **OPTICAL BLOCK:**
 - Lifetime L90B10 100000h
 - Luminous efficacy up to 135 lm/W
 - LED source flux from 1000 to 18000lm
 - PMMA optical lenses
 - Aluminum PCB (4 maximum)
 - Optics: Road (R), Semi urban (SU), Urban (U), Square (P), Bicycle path (PCY), Pedestrian crossing, Architectural.
 - Color temperatures: 3000K, 2700K, 2200K, 1800K (4000K, on request)
 - Optional coexistence of 2 color temperatures*.
 - Pre-wired HO7 RN-F flexible 6m
 - ULOR < 1%, ULR < 4% (in situ), CIE flux 3 code > 95%.
- **APPARATUS integrated in the dome :**
 - IP66 sealing
 - Optional antenna socket (Zhaga, Nema)
 - Driver Light prog, Driver Full prog (with DALI output on request), Driver SR or D4I and plug, optional
 - * Additional driver for mixed temperature option
- **ELECTRICAL PROTECTION :**
 - 10kV surge protector on request
 - Varistor on request
- **All our components are ENEC certified**

▼ FIXINGS

- **STANDARDS :**
 - Carried with 2 curved extruded aluminum arms on a cast aluminum overlapping node for 60mm top mast.
 - In suspended version in 34 PdG, without arms.
 - Other bows in option.

▼ DIMENSIONS

